


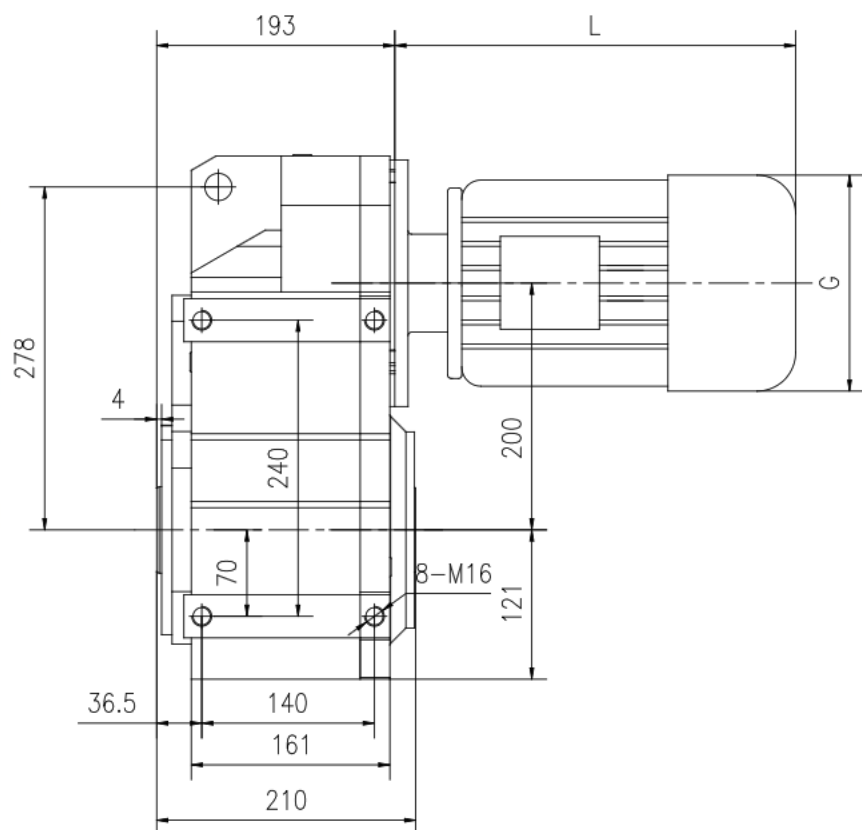


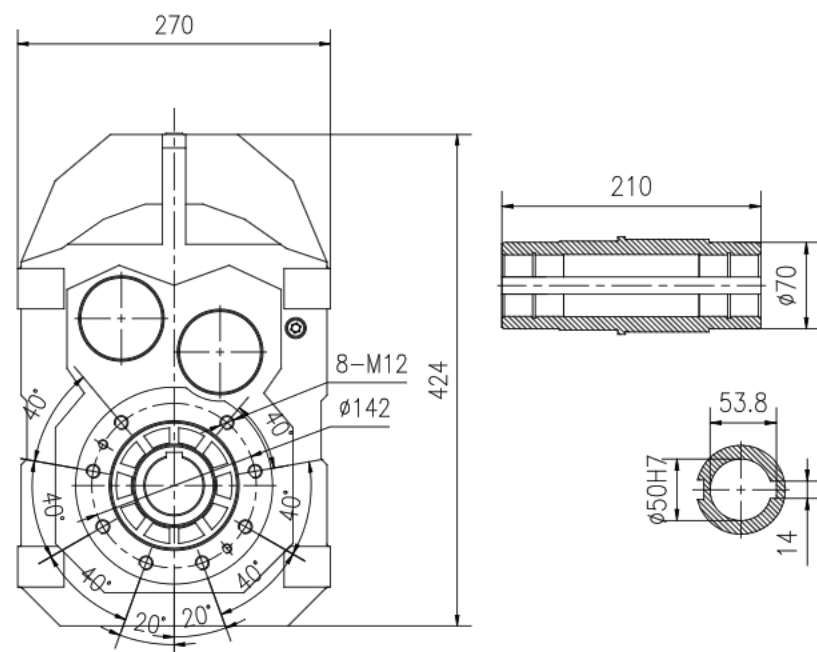

## Вариации входного фланца

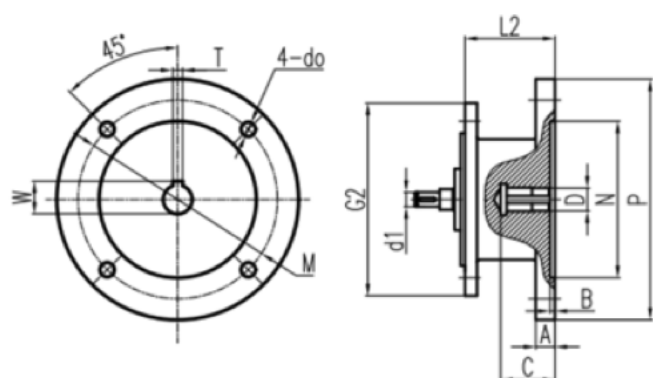

63B5~200B5

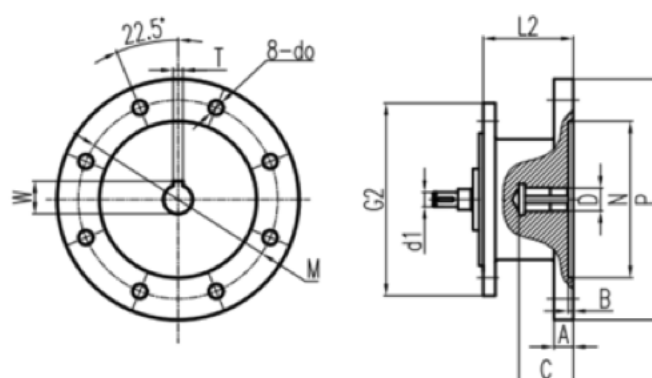

225B5~315B5

| Model      | B5 size | L2    | N    | M    | P    | do  | A  | B   | ≥C   | D   | T  | W    |
|------------|---------|-------|------|------|------|-----|----|-----|------|-----|----|------|
| <b>F77</b> | 63B5    | 50    | Φ95  | Φ115 | Φ140 | Φ10 | 14 | 4   | ≥24  | Φ11 | 4  | 12.8 |
|            | 71B5    | 50    | Φ110 | Φ130 | Φ160 | Φ10 | 10 | 4   | ≥31  | Φ14 | 5  | 16.3 |
|            | 80B5    | 68.5  | Φ130 | Φ160 | Φ200 | Φ12 | 16 | 4   | ≥41  | Φ19 | 6  | 21.9 |
|            | 90B5    | 68.5  | Φ130 | Φ160 | Φ200 | Φ12 | 16 | 4   | ≥51  | Φ24 | 8  | 27.3 |
|            | 100B5   | 82.5  | Φ180 | Φ215 | Φ250 | Φ15 | 17 | 4.5 | ≥61  | Φ28 | 8  | 31.3 |
|            | 112B5   | 82.5  | Φ180 | Φ215 | Φ250 | Φ15 | 17 | 4.5 | ≥81  | Φ28 | 8  | 31.3 |
|            | 132B5   | 111   | Φ230 | Φ265 | Φ300 | Φ15 | 17 | 6   | ≥111 | Φ38 | 10 | 41.3 |
|            | 160B5   | 152.5 | Φ250 | Φ300 | Φ350 | Φ19 | 24 | 6   | ≥111 | Φ42 | 12 | 45.3 |